



Yuasa Fiche de données techniques

Yuasa YBX5053 - Batteries SMF YBX5000 Silver Haute Performance

Performance

Tension	12V
Capacité (20 heures)	50Ah
Performances en démarrage à froid (EN1)	450A

Dimensions

Longueur	238mm
Largeur	129mm
Hauteur	223mm

Poids & Mesures

Poids moyen avec acide	12.4kg
------------------------	--------



Caractéristiques du bac

Type de bac	B24 JIS
Système de fixation	N
Indicateur de l'état de charge	✓
Poignées	✓
Sortie(s) d'aération	✓
Type de couvercle	Double capot (anti-écoulement et sans entretien)


Technologie

Dispositif stop-flamme	✓
Technologie	Ca/Ca
Séparateur	PE
Test de retournement VDA	✓
Taux de charge recommandé	3A
Performance Marking	W4-C2-V3-E1

Type de bornes

T1/T3

Standard DIN Post



Remove T1 adapter for T3





Schéma de montage des éléments Système de fixation de la batterie



Date de publication: 26/04/2024 - E&OE

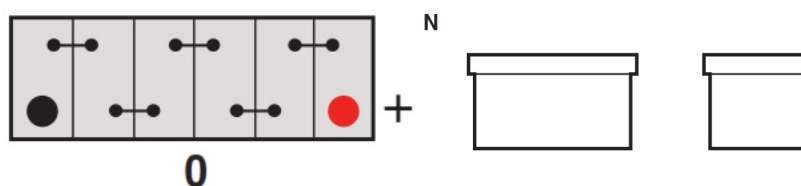

Yuasa Technical Data Sheet

Yuasa YBX5053 - YBX5000 Silver High Performance SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	50Ah
Cold Cranking Amps (EN1)	450A

Dimensions

Length	238mm
Width	129mm
Height	223mm

Weights & Measures

Mean Weight with Acid	12.4kg
-----------------------	--------



Container Features

Case Type	B24 JIS
Hold Down	N
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	3A
Performance Marking	W4-C2-V3-E1


Terminal Type

T1/T3


Standard DIN Post



Remove T1 adapter for T3



Cell Assembly Layout

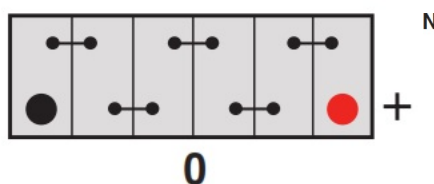

Battery Hold-down



Data Sheet generated on 26/04/2024 – E&OE