



Yuasa Fiche de données techniques

Yuasa 44B19L

Performance

Tension	12V
Capacité (20 heures)	40Ah
Performances en démarrage à froid (EN1)	340A

Dimensions

Longueur	187mm
Largeur	127mm
Hauteur	225mm

Poids & Mesures

Poids moyen avec acide	10.6kg
Poids sans acide	-
Volume d'acide	2.7 Litres

Caractéristiques du bac

Type de boîtier	B19 JIS
Système de fixation	N
Type de couvercle	Couvercle plat




Technologie

Dispositif pare-flammes	✓
Technologie	Ca/Ca
Séparateur	PE
Vibration	V1 (30Hz/3g/2hr)
Taux de charge recommandé	2A

Type de bornes

T1/T3

Standard DIN Post



Remove T1 adapter for T3





Schéma de montage des éléments Système de fixation de la batterie



Date de publication: 18/03/2018 - E&OE

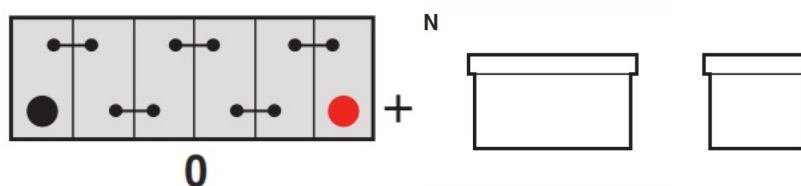

Yuasa Technical Data Sheet

Yuasa 44B19L

Performance

Voltage	12V
Capacity (20-hour)	40Ah
Cold Cranking Amps (EN1)	340A

Dimensions

Length	187mm
Width	127mm
Height	225mm

Weights & Measures

Mean Weight with Acid	10.6kg
Dry Weight	-
Acid Volume	2.7 litres

Container Features

Case Type	B19 JIS
Hold Down	N
State of Charge Indicator	-
Handles	-
End Venting	-
Semi-Traction Features	-
Lid Type	Flat Lid




Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	-
Vibration	V1 (30Hz/3g/2hr)
Recommended Charge Rate	2A


Terminal Type

T1/T3


Standard DIN Post



Remove T1 adapter for T3



Cell Assembly Layout

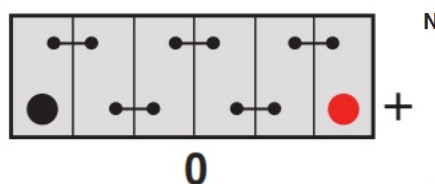

Battery Hold-down



Data Sheet generated on 18/03/2018 - E&OE