



## Yuasa Fiche de données techniques

Yuasa HJ-LD26L -

### Performance

Tension	12V
Capacité (20 heures)	60Ah
Performances en démarrage à froid (EN1)	450A

### Dimensions

Longueur	260mm
Largeur	173mm
Hauteur	202mm

### Poids & Mesures

Poids moyen avec acide	18kg
Poids sans acide	-
Volume d'acide	-



For Illustration Purposes Only

### Caractéristiques du bac

Type de boîtier	D26 JIS AGM (R33/4 Skyline)
Système de fixation	N
Ventilation latérale	✓
Caractéristiques semi-traction	✓
Type de couvercle	VRLA


### Technologie

Dispositif pare-flammes	✓
Technologie	Ca/Ca VRLA
Séparateur	AGM
Vibration	V1 (30Hz/3g/2hr)
Taux de charge recommandé	4A


### Type de bornes

T1

Standard DIN Post

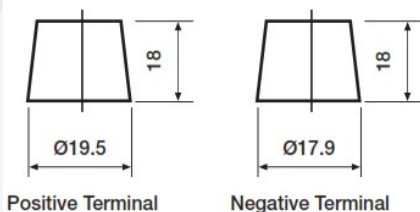

### Schéma de montage des éléments

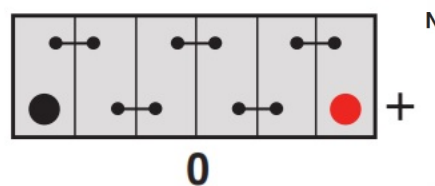

### Système de fixation de la batterie



Date de publication: 18/03/2018 - E&OE



## Yuasa Technical Data Sheet

### Yuasa HJ-LD26L - Auxilliary, Backup & Specialist Batteries

#### Performance

Voltage	12V
Capacity (20-hour)	60Ah
Cold Cranking Amps (EN1)	450A

#### Dimensions

Length	260mm
Width	173mm
Height	202mm

#### Weights & Measures

Mean Weight with Acid	18kg
Dry Weight	-
Acid Volume	-



For Illustration Purposes Only

#### Container Features

Case Type	D26 JIS AGM (R33/4 Skyline)
Hold Down	N
State of Charge Indicator	-
Handles	-
End Venting	✓
Semi-Traction Features	✓
Lid Type	VRLA


#### Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca VRLA AGM
VDA Roll Over Test	-
Vibration	V1 (30Hz/3g/2hr)
Recommended Charge Rate	4A


#### Terminal Type

##### T1

Standard DIN Post

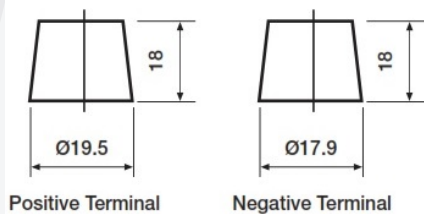

#### Cell Assembly Layout

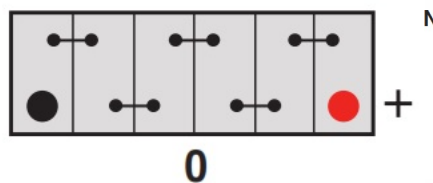

#### Battery Hold-down



Data Sheet generated on 18/03/2018 - E&OE