



## Yuasa Fiche de données techniques

Yuasa HJ-S34B20L -

### Performance

Tension	12V
Capacité (20 heures)	35Ah
Performances en démarrage à froid (EN1)	272A

### Dimensions

Longueur	197mm
Largeur	129mm
Hauteur	227mm



### Poids & Mesures

Poids moyen avec acide	10.5kg
Poids sans acide	-
Volume d'acide	-

### Caractéristiques du bac


Type de boîtier	B20 JIS AGM
Système de fixation	N
Caractéristiques semi-traction	✓
Type de couvercle	VRLA

### Technologie


Dispositif pare-flammes	✓
Technologie	Ca/Ca VRLA
Séparateur	AGM
Vibration	V1 (30Hz/3g/2hr)
Taux de charge recommandé	2A

### Type de bornes

**T3**  
Small Japanese  
JIS Terminal



### Schéma de montage des éléments

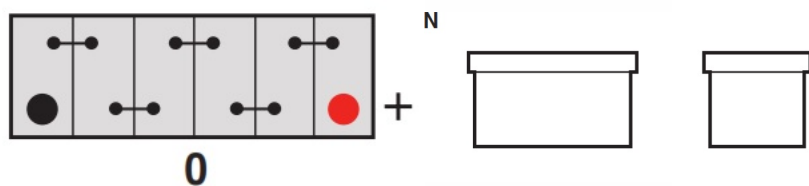

### Système de fixation de la batterie

Date de publication: 18/03/2018 - E&OE



## Yuasa Technical Data Sheet

### Yuasa HJ-S34B20L - Auxilliary, Backup & Specialist Batteries

#### Performance

Voltage	12V
Capacity (20-hour)	35Ah
Cold Cranking Amps (EN1)	272A

#### Dimensions

Length	197mm
Width	129mm
Height	227mm

#### Weights & Measures

Mean Weight with Acid	10.5kg
Dry Weight	-
Acid Volume	-



#### Container Features


Case Type	B20 JIS AGM
Hold Down	N
State of Charge Indicator	-
Handles	-
End Venting	-
Semi-Traction Features	✓
Lid Type	VRLA

#### Technology


Flame Arrestor Technology	✓
Separator	Ca/Ca VRLA AGM
VDA Roll Over Test	-
Vibration	V1 (30Hz/3g/2hr)
Recommended Charge Rate	2A

#### Terminal Type

**T3**  
Small Japanese  
JIS Terminal



#### Cell Assembly Layout

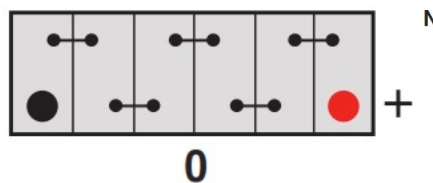

#### Battery Hold-down



Data Sheet generated on 18/03/2018 - E&OE