



Yuasa Fiche de données techniques

Yuasa YBX1012 - Batteries CaCa YBX1000

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

Tension	12V
Capacité (20 heures)	45Ah
Performances en démarrage à froid (EN1)	380A

Dimensions

Longueur	207mm
Largeur	175mm
Hauteur	190mm



Poids & Mesures

Poids moyen avec acide	12.7kg
Volume d'acide	3.1 Litres

Caractéristiques du bac

Type de bac	L1 DIN
Système de fixation	B3
Indicateur de l'état de charge	✓
Poignées	✓
Sortie(s) d'aération	✓
Type de couvercle	Ventilation centrale

Technologie

Dispositif stop-flamme	✓
Technologie	Ca/Ca
Séparateur	PE
Taux de charge recommandé	3A
Performance Marking	W3-C2-V2-E1

Type de bornes

T1

Standard DIN Post



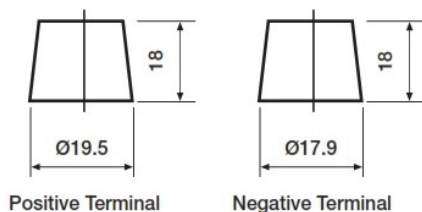


Schéma de montage des éléments

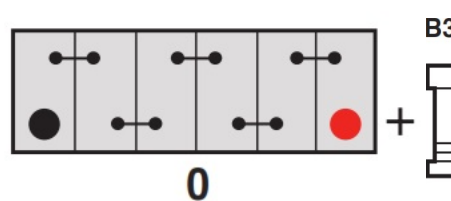

Système de fixation de la batterie

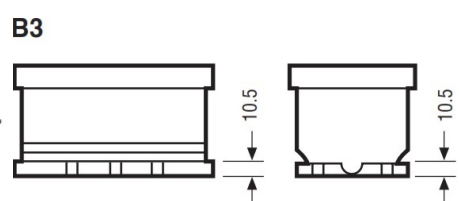

Date de publication: 16/04/2021 - E&OE



Yuasa Technical Data Sheet

Yuasa YBX1012 - YBX1000 CaCa Batteries

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

Voltage	12V
Capacity (20-hour)	45Ah
Cold Cranking Amps (EN1)	380A

Dimensions

Length	207mm
Width	175mm
Height	190mm



Weights & Measures

Mean Weight with Acid	12.7kg
Acid Volume	3.1 litres

Container Features

Case Type	L1 DIN
Hold Down	B3
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	Central Venting

Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
Recommended Charge Rate	3A
Performance Marking	W3-C2-V2-E1

Terminal Type

T1


Standard DIN Post



Positive Terminal

Negative Terminal


Cell Assembly Layout

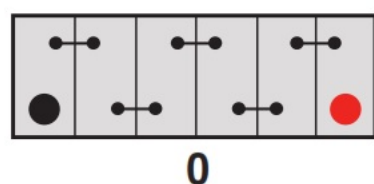

0

Battery Hold-down

B3

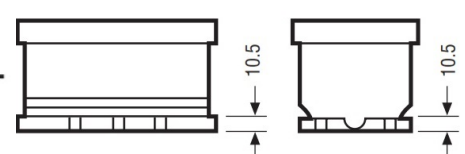

Data Sheet generated on 16/04/2021 - E&OE