



## Yuasa Fiche de données techniques

### Yuasa YBX1100 - Batteries CaCa YBX1000

#### Performance

|   |      |
|---|------|
| Tension                                 | 12V  |
| Capacité (20 heures)                    | 65Ah |
| Performances en démarrage à froid (EN1) | 540A |

#### Dimensions

|          |       |
|----------|-------|
| Longueur | 278mm |
| Largeur  | 175mm |
| Hauteur  | 175mm |



#### Poids & Mesures

|                        |            |
|------------------------|------------|
| Poids moyen avec acide | 15.8kg     |
| Volume d'acide         | 3.8 Litres |

#### Caractéristiques du bac

|                                |                      |
|--------------------------------|----------------------|
| Type de bac                    | LB3 DIN              |
| Système de fixation            | B13/B14              |
| Indicateur de l'état de charge | ✓                    |
| Poignées                       | ✓                    |
| Sortie(s) d'aération           | ✓                    |
| Type de couvercle              | Ventilation centrale |


#### Technologie

|                           |             |
|---------------------------|-------------|
| Dispositif stop-flamme    | ✓           |
| Technologie               | Ca/Ca       |
| Séparateur                | PE          |
| Taux de charge recommandé | 4A          |
| Performance Marking       | W3-C2-V2-E1 |


#### Type de bornes

##### T1

Standard DIN Post

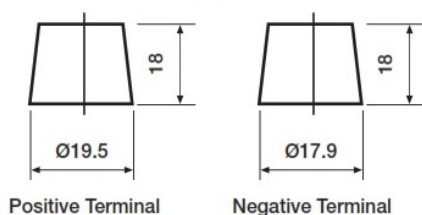


#### Schéma de montage des éléments

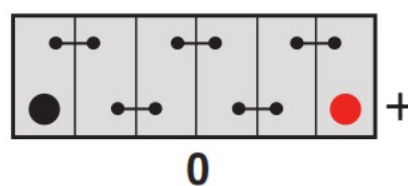

#### Système de fixation de la batterie

B3/B4 (B3 with Hold-Down adaptor)

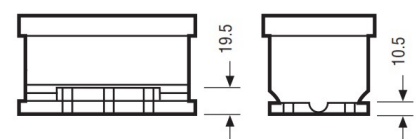

Date de publication: 22/03/2023 - E&OE



## Yuasa Technical Data Sheet

### Yuasa YBX1100 - YBX1000 CaCa Batteries

#### Performance

|                          |      |
|--------------------------|------|
| Voltage                  | 12V  |
| Capacity (20-hour)       | 65Ah |
| Cold Cranking Amps (EN1) | 540A |

#### Dimensions

|        |       |
|--------|-------|
| Length | 278mm |
| Width  | 175mm |
| Height | 175mm |

#### Weights & Measures

|                       |            |
|-----------------------|------------|
| Mean Weight with Acid | 15.8kg     |
| Acid Volume           | 3.8 litres |



#### Container Features

|                           |                 |
|---------------------------|-----------------|
| Case Type                 | LB3 DIN         |
| Hold Down                 | B13/B14         |
| State of Charge Indicator | ✓               |
| Handles                   | ✓               |
| End Venting               | ✓               |
| Lid Type                  | Central Venting |


#### Technology

|                         |             |
|-------------------------|-------------|
| Flame Arrestor          | ✓           |
| Technology              | Ca/Ca       |
| Separator               | PE          |
| Recommended Charge Rate | 4A          |
| Performance Marking     | W3-C2-V2-E1 |

#### Terminal Type

##### T1


Standard DIN Post

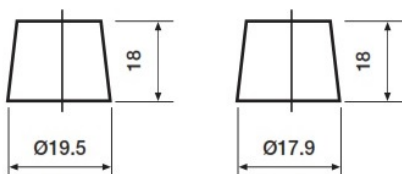

Positive Terminal


Negative Terminal

#### Cell Assembly Layout

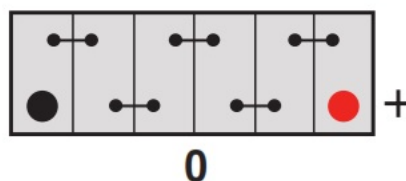

#### Battery Hold-down

B3/B4 (B3 with Hold-Down adaptor)

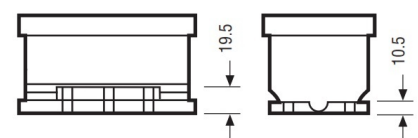

Data Sheet generated on 22/03/2023 - E&OE