



## Yuasa Fiche de données techniques

### Yuasa YBX1621 - Super Heavy Duty Battery

#### Performance

|   |       |
|---|-------|
| Tension                                 | 12V   |
| Capacité (20 heures)                    | 155Ah |
| Performances en démarrage à froid (EN1) | 900A  |

#### Dimensions

|          |       |
|----------|-------|
| Longueur | 513mm |
| Largeur  | 223mm |
| Hauteur  | 223mm |



#### Poids & Mesures

|                        |      |
|------------------------|------|
| Poids moyen avec acide | 42kg |
|------------------------|------|

#### Caractéristiques du bac

|                     |             |
|---------------------|-------------|
| Type de bac         | DIN B       |
| Schéma de montage   | 3           |
| Système de fixation | N           |
| Poignées            | ✓           |
| Type de couvercle   | Raised Plug |


#### Technologie

|                           |             |
|---------------------------|-------------|
| Technologie               | Sb/Ca       |
| Taux de charge recommandé | 8A          |
| Performance Marking       | W2-C2-V2-E1 |


#### Type de bornes

##### T1

Standard DIN Post

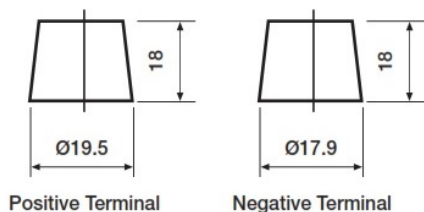

#### Schéma de montage des éléments

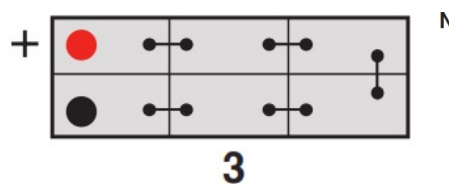

#### Système de fixation de la batterie



Date de publication: 22/03/2023 - E&OE



## Yuasa Technical Data Sheet

### Yuasa YBX1621 - Super Heavy Duty Battery

#### Performance

|                          |       |
|--------------------------|-------|
| Voltage                  | 12V   |
| Capacity (20-hour)       | 155Ah |
| Cold Cranking Amps (EN1) | 900A  |

#### Dimensions

|        |       |
|--------|-------|
| Length | 513mm |
| Width  | 223mm |
| Height | 223mm |

#### Weights & Measures

|                       |      |
|-----------------------|------|
| Mean Weight with Acid | 42kg |
|-----------------------|------|



#### Container Features

|             |             |
|-------------|-------------|
| Case Type   | DIN B       |
| Cell Layout | 3           |
| Hold Down   | N           |
| Handles     | ✓           |
| Lid Type    | Raised Plug |


#### Technology

|                         |             |
|-------------------------|-------------|
| Technology              | Sb/Ca       |
| Recommended Charge Rate | 8A          |
| Performance Marking     | W2-C2-V2-E1 |

#### Terminal Type

##### T1


Standard DIN Post

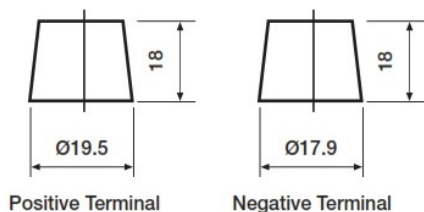

Positive Terminal

Negative Terminal

#### Cell Assembly Layout

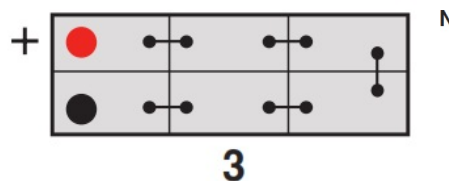

3

#### Battery Hold-down



Data Sheet generated on 22/03/2023 - E&OE