



## Yuasa Fiche de données techniques

### Yuasa YBX1633 - Super Heavy Duty Battery

#### Performance

|   |       |
|---|-------|
| Tension                                 | 12V   |
| Capacité (20 heures)                    | 140Ah |
| Performances en démarrage à froid (EN1) | 900A  |

#### Dimensions

|          |       |
|----------|-------|
| Longueur | 360mm |
| Largeur  | 253mm |
| Hauteur  | 240mm |



#### Poids & Mesures

|                        |        |
|------------------------|--------|
| Poids moyen avec acide | 40.8kg |
|------------------------|--------|

#### Caractéristiques du bac

|                     |             |
|---------------------|-------------|
| Type de bac         | Volvo       |
| Schéma de montage   | 6           |
| Système de fixation | B1          |
| Poignées            | ✓           |
| Type de couvercle   | Raised Plug |


#### Technologie

|                           |             |
|---------------------------|-------------|
| Technologie               | Sb/Ca       |
| Taux de charge recommandé | 7A          |
| Performance Marking       | W2-C2-V2-E1 |

#### Type de bornes

##### T1


Standard DIN Post

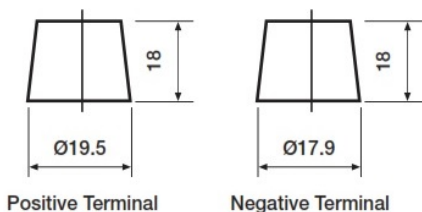

Positive Terminal

Negative Terminal


#### Schéma de montage des éléments



6

#### Système de fixation de la batterie

##### B1

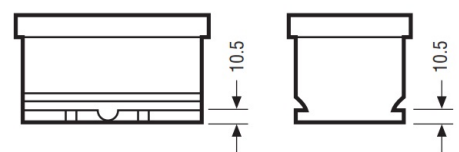

Date de publication: 02/07/2022 - E&OE



## Yuasa Technical Data Sheet

### Yuasa YBX1633 - Super Heavy Duty Battery

#### Performance

|                          |       |
|--------------------------|-------|
| Voltage                  | 12V   |
| Capacity (20-hour)       | 140Ah |
| Cold Cranking Amps (EN1) | 900A  |

#### Dimensions

|        |       |
|--------|-------|
| Length | 360mm |
| Width  | 253mm |
| Height | 240mm |

#### Weights & Measures

|                       |        |
|-----------------------|--------|
| Mean Weight with Acid | 40.8kg |
|-----------------------|--------|



#### Container Features

|             |             |
|-------------|-------------|
| Case Type   | Volvo       |
| Cell Layout | 6           |
| Hold Down   | B1          |
| Handles     | ✓           |
| Lid Type    | Raised Plug |


#### Technology

|                         |             |
|-------------------------|-------------|
| Technology              | Sb/Ca       |
| Recommended Charge Rate | 7A          |
| Performance Marking     | W2-C2-V2-E1 |

#### Terminal Type

##### T1


Standard DIN Post

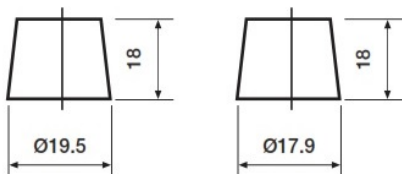

Positive Terminal


Negative Terminal

#### Cell Assembly Layout



#### Battery Hold-down

##### B1

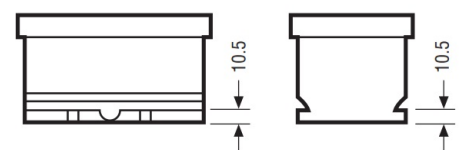

Data Sheet generated on 02/07/2022 - E&OE