



Yuasa Fiche de données techniques

Yuasa YBX3078 - Batteries SMF YBX3000

Performance

Tension	12V
Capacité (20 heures)	62Ah
Performances en démarrage à froid (EN1)	550A

Dimensions

Longueur	243mm
Largeur	175mm
Hauteur	190mm



Poids & Mesures

Poids moyen avec acide	16kg
------------------------	------

Caractéristiques du bac

Type de bac	L2 DIN
Schéma de montage	1
Système de fixation	B3
Indicateur de l'état de charge	✓
Poignées	✓
Sortie(s) d'aération	✓
Type de couvercle	Double capot (anti-écoulement et sans entretien)

Technologie

Dispositif stop-flamme	✓
Technologie	Ca/Ca
Séparateur	PE
Test de retournement VDA	✓
Taux de charge recommandé	4A
Performance Marking	W3-C2-V2-E1

Type de bornes

T1

Standard DIN Post



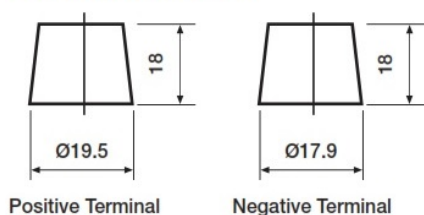


Schéma de montage des éléments

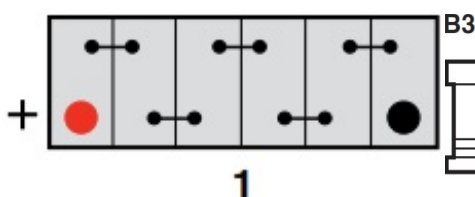

Système de fixation de la batterie

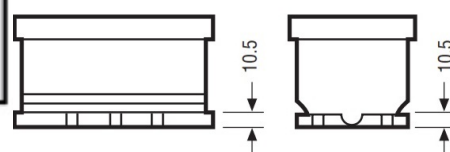

Date de publication: 20/04/2024 - E&OE



Yuasa Technical Data Sheet

Yuasa YBX3078 - YBX3000 SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	62Ah
Cold Cranking Amps (EN1)	550A

Dimensions

Length	243mm
Width	175mm
Height	190mm

Weights & Measures

Mean Weight with Acid	16kg
-----------------------	------



Container Features

Case Type	L2 DIN
Cell Layout	1
Hold Down	B3
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid

Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	4A
Performance Marking	W3-C2-V2-E1

Terminal Type

T1


Standard DIN Post




Positive Terminal

Negative Terminal

Cell Assembly Layout

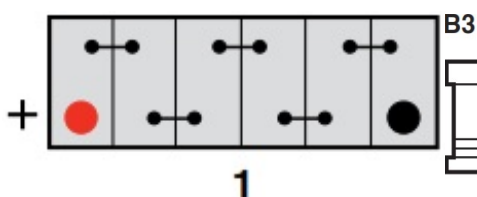

Battery Hold-down

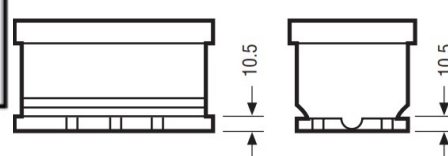

Data Sheet generated on 20/04/2024 - E&OE