



Yuasa Fiche de données techniques

Yuasa YBX3750 - Batteries SMF YBX3000

Performance

Tension	12V
Capacité (20 heures)	66Ah
Performances en démarrage à froid (EN1)	660A

Dimensions

Longueur	230mm
Largeur	179mm
Hauteur	185mm



Poids & Mesures

Poids moyen avec acide	15kg
------------------------	------

Caractéristiques du bac

Type de bac	US Group 75R FT
Schéma de montage	1
Système de fixation	B1
Indicateur de l'état de charge	✓
Poignées	✓
Sortie(s) d'aération	✓
Type de couvercle	Double capot (anti-écoulement et sans entretien)

Technologie

Dispositif stop-flamme	✓
Technologie	Ca/Ca
Séparateur	PE
Test de retournement VDA	✓
Taux de charge recommandé	4A
Performance Marking	W4-C2-V3-E1

Type de bornes





Schéma de montage des éléments



Système de fixation de la batterie

Date de publication: 26/04/2024 - E&OE

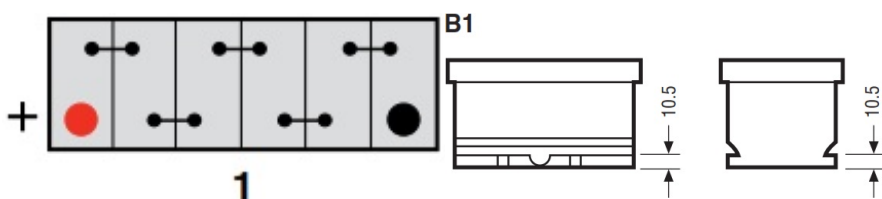

Yuasa Technical Data Sheet

Yuasa YBX3750 - YBX3000 SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	66Ah
Cold Cranking Amps (EN1)	660A

Dimensions

Length	230mm
Width	179mm
Height	185mm

Weights & Measures

Mean Weight with Acid	15kg
-----------------------	------




Container Features

Case Type	US Group 75R FT
Cell Layout	1
Hold Down	B1
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	4A
Performance Marking	W4-C2-V3-E1


Terminal Type



Cell Assembly Layout

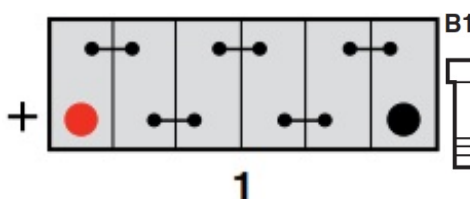

Battery Hold-down

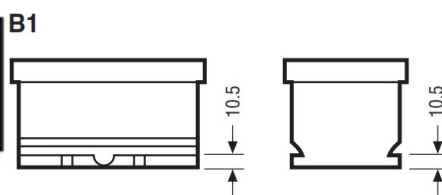

Data Sheet generated on 26/04/2024 - E&OE