



Yuasa Fiche de données techniques

Yuasa YBX5019 - Batteries SMF YBX5000 Silver Haute Performance

Performance

| | |
|---|-------|
| Tension | 12V |
| Capacité (20 heures) | 100Ah |
| Performances en démarrage à froid (EN1) | 900A |

Dimensions

| | |
|----------|-------|
| Longueur | 353mm |
| Largeur | 175mm |
| Hauteur | 190mm |



Poids & Mesures

| | |
|------------------------|--------|
| Poids moyen avec acide | 23.3kg |
|------------------------|--------|

Caractéristiques du bac

| | |
|--------------------------------|---|
| Type de bac | L5 DIN |
| Type de bornes | T1 |
| Système de fixation | B3 |
| Indicateur de l'état de charge | ✓ |
| Poignées | ✓ |
| Sortie(s) d'aération | ✓ |
| Type de couvercle | Double capot (anti-écoulement et sans entretien) |

Technologie

| | |
|---------------------------|-------------|
| Dispositif stop-flamme | ✓ |
| Technologie | Ca/Ca |
| Séparateur | PE |
| Test de retournement VDA | ✓ |
| Taux de charge recommandé | 6A |
| Performance Marking | W4-C2-V3-E1 |

Type de bornes

T1

Standard DIN Post


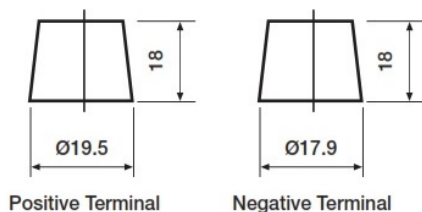


Schéma de montage des éléments



Date de publication: 15/04/2021 - E&OE

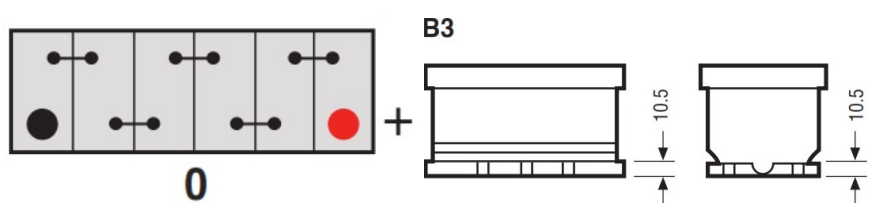

Yuasa Technical Data Sheet

Yuasa YBX5019 - YBX5000 Silver High Performance SMF Batteries

Performance


| | |
|--------------------------|-------|
| Voltage | 12V |
| Capacity (20-hour) | 100Ah |
| Cold Cranking Amps (EN1) | 900A |

Dimensions

| | |
|--------|-------|
| Length | 353mm |
| Width | 175mm |
| Height | 190mm |

Weights & Measures

| | |
|-----------------------|--------|
| Mean Weight with Acid | 23.3kg |
|-----------------------|--------|

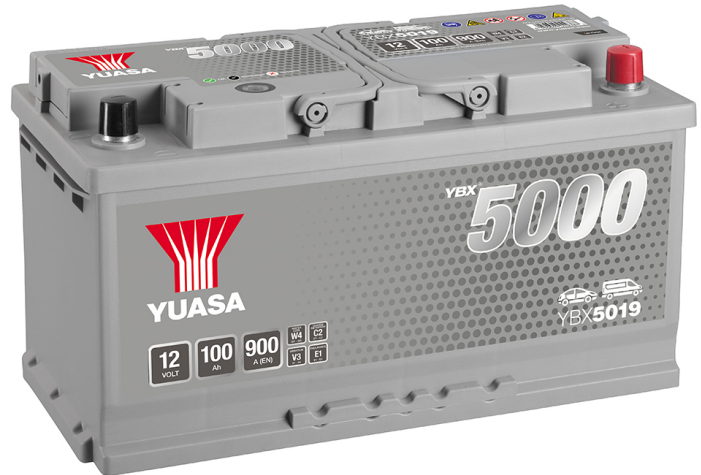

Container Features

| | |
|---------------------------|----------------|
| Case Type | L5 DIN |
| Terminal Type | T1 |
| Hold Down | B3 |
| State of Charge Indicator | ✓ |
| Handles | ✓ |
| End Venting | ✓ |
| Lid Type | SMF Double Lid |

Technology

| | |
|---------------------------|-------------|
| Flame Arrestor Technology | ✓ |
| Separator | Ca/Ca PE |
| VDA Roll Over Test | ✓ |
| Recommended Charge Rate | 6A |
| Performance Marking | W4-C2-V3-E1 |

Terminal Type

Cell Assembly Layout

Battery Hold-down

Data Sheet generated on 15/04/2021 – E&OE