



Yuasa Fiche de données techniques

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Yuasa YBX5020 - Batteries SMF YBX5000 Silver Haute Performance

Performance

Tension	12V
Capacité (20 heures)	110Ah
Performances en démarrage à froid (EN1)	950A

Dimensions

Longueur	393mm
Largeur	175mm
Hauteur	190mm



Poids & Mesures

Poids moyen avec acide	26.3kg
------------------------	--------

Caractéristiques du bac

Type de bac	L6 DIN
Système de fixation	B3
Indicateur de l'état de charge	✓
Poignées	✓
Sortie(s) d'aération	✓
Type de couvercle	Double capot (anti-écoulement et sans entretien)

Technologie

Dispositif stop-flamme	✓
Technologie	Ca/Ca
Séparateur	PE
Test de retournement VDA	✓
Taux de charge recommandé	6A
Performance Marking	W4-C2-V3-E1

Type de bornes

T1

Standard DIN Post



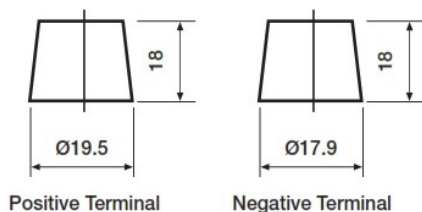


Schéma de montage des éléments

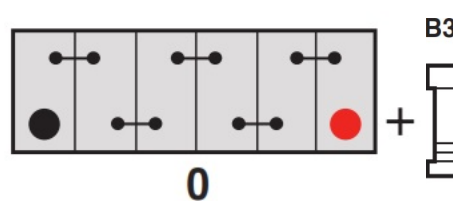

Système de fixation de la batterie

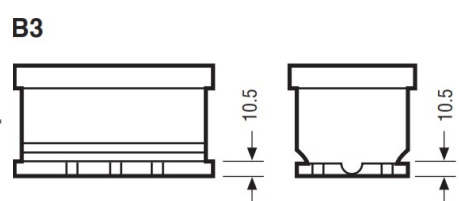

Date de publication: 15/04/2021 - E&OE



Yuasa Technical Data Sheet

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Yuasa YBX5020 - YBX5000 Silver High Performance SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	110Ah
Cold Cranking Amps (EN1)	950A

Dimensions

Length	393mm
Width	175mm
Height	190mm

Weights & Measures

Mean Weight with Acid	26.3kg
-----------------------	--------



Container Features

Case Type	L6 DIN
Hold Down	B3
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	6A
Performance Marking	W4-C2-V3-E1

Terminal Type

T1


Standard DIN Post

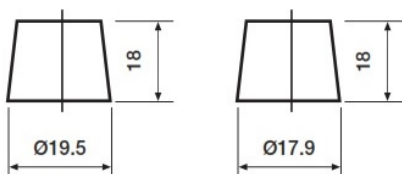


Positive Terminal

Negative Terminal

Cell Assembly Layout

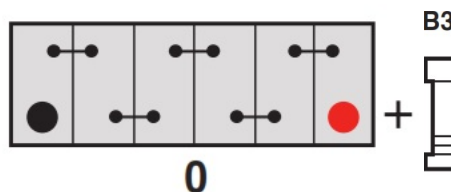

Battery Hold-down

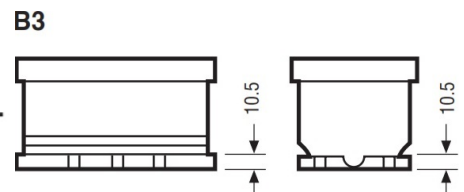

Data Sheet generated on 15/04/2021 – E&OE