



Yuasa Fiche de données techniques

Yuasa YBX5054 - Batteries SMF YBX5000 Silver Haute Performance

Performance

| | |
|---|------|
| Tension | 12V |
| Capacité (20 heures) | 40Ah |
| Performances en démarrage à froid (EN1) | 360A |

Dimensions

| | |
|----------|-------|
| Longueur | 187mm |
| Largeur | 127mm |
| Hauteur | 223mm |



Poids & Mesures

| | |
|------------------------|-------|
| Poids moyen avec acide | 9.4kg |
|------------------------|-------|

Caractéristiques du bac

| | |
|--------------------------------|--|
| Type de bac | B19 JIS |
| Système de fixation | N |
| Indicateur de l'état de charge | ✓ |
| Poignées | ✓ |
| Sortie(s) d'aération | ✓ |
| Type de couvercle | Double capot (anti-écoulement et sans entretien) |


Technologie

| | |
|---------------------------|-------------|
| Dispositif stop-flamme | ✓ |
| Technologie | Ca/Ca |
| Séparateur | PE |
| Test de retournement VDA | ✓ |
| Taux de charge recommandé | 2A |
| Performance Marking | W4-C2-V3-E1 |

Type de bornes

T1/T3

Standard DIN Post



Remove T1 adapter for T3





Schéma de montage des éléments Système de fixation de la batterie



Date de publication: 25/01/2022 - E&OE

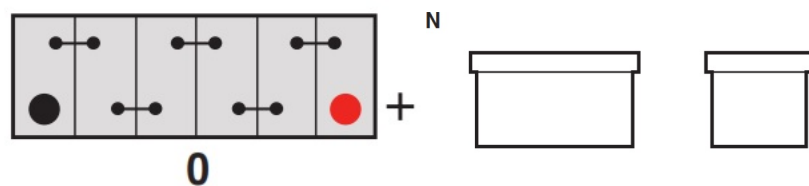

Yuasa Technical Data Sheet

Yuasa YBX5054 - YBX5000 Silver High Performance SMF Batteries

Performance

| | |
|--------------------------|------|
| Voltage | 12V |
| Capacity (20-hour) | 40Ah |
| Cold Cranking Amps (EN1) | 360A |

Dimensions

| | |
|--------|-------|
| Length | 187mm |
| Width | 127mm |
| Height | 223mm |

Weights & Measures

| | |
|-----------------------|-------|
| Mean Weight with Acid | 9.4kg |
|-----------------------|-------|



Container Features

| | |
|---------------------------|----------------|
| Case Type | B19 JIS |
| Hold Down | N |
| State of Charge Indicator | ✓ |
| Handles | ✓ |
| End Venting | ✓ |
| Lid Type | SMF Double Lid |


Technology

| | |
|---------------------------|-------------|
| Flame Arrestor Technology | ✓ |
| Separator | Ca/Ca PE |
| VDA Roll Over Test | ✓ |
| Recommended Charge Rate | 2A |
| Performance Marking | W4-C2-V3-E1 |


Terminal Type

T1/T3


Standard DIN Post



Remove T1 adapter for T3



Cell Assembly Layout

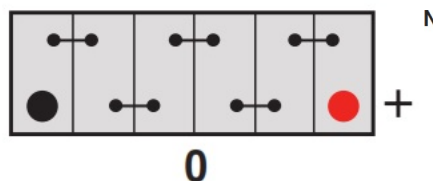

Battery Hold-down



Data Sheet generated on 25/01/2022 - E&OE