



## Yuasa Fiche de données techniques

### Yuasa YBX5068 - Batteries SMF YBX5000 Silver Haute Performance

#### Performance

|                                         |      |
|-----------------------------------------|------|
| Tension                                 | 12V  |
| Capacité (20 heures)                    | 75Ah |
| Performances en démarrage à froid (EN1) | 650A |

#### Dimensions

|          |       |
|----------|-------|
| Longueur | 269mm |
| Largeur  | 174mm |
| Hauteur  | 225mm |



#### Poids & Mesures

|                        |        |
|------------------------|--------|
| Poids moyen avec acide | 18.1kg |
|------------------------|--------|

#### Caractéristiques du bac

|                                |                                                  |
|--------------------------------|--------------------------------------------------|
| Type de bac                    | JIS D26 + B5                                     |
| Système de fixation            | B5                                               |
| Indicateur de l'état de charge | ✓                                                |
| Poignées                       | ✓                                                |
| Sortie(s) d'aération           | ✓                                                |
| Type de couvercle              | Double capot (anti-écoulement et sans entretien) |


#### Technologie

|                           |             |
|---------------------------|-------------|
| Dispositif stop-flamme    | ✓           |
| Technologie               | Ca/Ca       |
| Séparateur                | PE          |
| Test de retournement VDA  | ✓           |
| Taux de charge recommandé | 4A          |
| Performance Marking       | W4-C2-V3-E1 |


#### Type de bornes

##### T1


Standard DIN Post

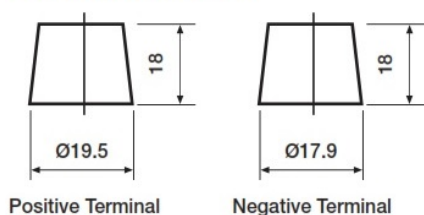

#### Schéma de montage des éléments

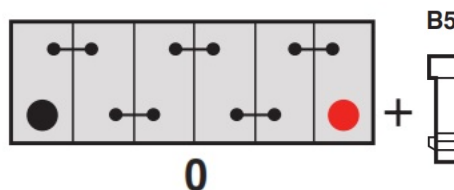

#### Système de fixation de la batterie

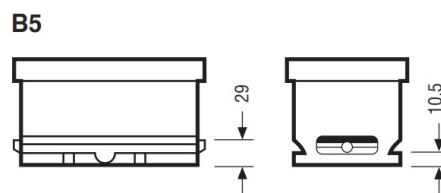

Date de publication: 24/04/2024 - E&OE



## Yuasa Technical Data Sheet

### Yuasa YBX5068 - YBX5000 Silver High Performance SMF Batteries

#### Performance

|                          |      |
|--------------------------|------|
| Voltage                  | 12V  |
| Capacity (20-hour)       | 75Ah |
| Cold Cranking Amps (EN1) | 650A |

#### Dimensions

|        |       |
|--------|-------|
| Length | 269mm |
| Width  | 174mm |
| Height | 225mm |

#### Weights & Measures

|                       |        |
|-----------------------|--------|
| Mean Weight with Acid | 18.1kg |
|-----------------------|--------|



#### Container Features

|                           |                |
|---------------------------|----------------|
| Case Type                 | JIS D26 + B5   |
| Hold Down                 | B5             |
| State of Charge Indicator | ✓              |
| Handles                   | ✓              |
| End Venting               | ✓              |
| Lid Type                  | SMF Double Lid |

#### Technology

|                         |             |
|-------------------------|-------------|
| Flame Arrestor          | ✓           |
| Technology              | Ca/Ca       |
| Separator               | PE          |
| VDA Roll Over Test      | ✓           |
| Recommended Charge Rate | 4A          |
| Performance Marking     | W4-C2-V3-E1 |


#### Terminal Type

##### T1


Standard DIN Post



#### Cell Assembly Layout

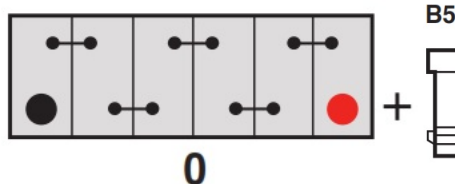

#### Battery Hold-down

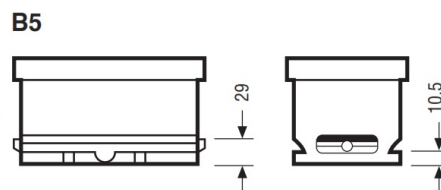

Data Sheet generated on 24/04/2024 - E&OE