



Yuasa Fiche de données techniques

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Yuasa YBX7027 - Batteries EFB YBX7000 Start Stop Plus

Performance

| | |
|---|------|
| Tension | 12V |
| Capacité (20 heures) | 65Ah |
| Performances en démarrage à froid (EN1) | 600A |

Dimensions

| | |
|----------|-------|
| Longueur | 242mm |
| Largeur | 175mm |
| Hauteur | 190mm |

Poids & Mesures

| | |
|------------------------|--------|
| Poids moyen avec acide | 16.6kg |
|------------------------|--------|



Caractéristiques du bac

| | |
|--------------------------------|--|
| Type de bac | L2 DIN EFB |
| Type de bornes | T1 |
| Système de fixation | B3 |
| Indicateur de l'état de charge | ✓ |
| Poignées | ✓ |
| Sortie(s) d'aération | ✓ |
| Type de couvercle | Double capot (anti-écoulement et sans entretien) |

Technologie

| | |
|---------------------------|-------------|
| Dispositif stop-flamme | ✓ |
| Technologie | Ca/Ca |
| Séparateur | PE |
| Test de retournement VDA | ✓ |
| Taux de charge recommandé | 4A |
| Performance Marking | W3-C2-V3-M1 |

Type de bornes

T1

Standard DIN Post


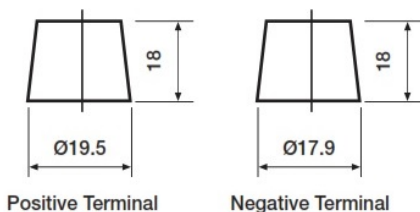


Schéma de montage des éléments



Système de fixation de la batterie

Date de publication: 06/10/2022 - E&OE

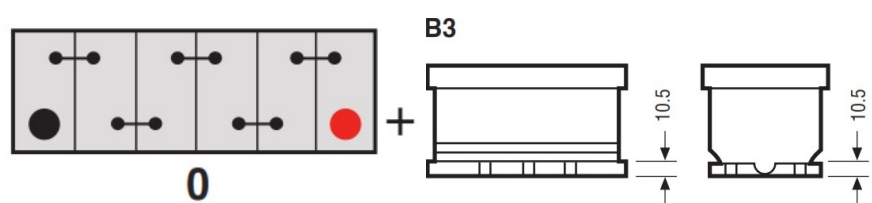

Yuasa Technical Data Sheet

Yuasa YBX7027 - YBX7000 EFB Start Stop Plus Batteries

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

| | |
|--------------------------|------|
| Voltage | 12V |
| Capacity (20-hour) | 65Ah |
| Cold Cranking Amps (EN1) | 600A |

Dimensions

| | |
|--------|-------|
| Length | 242mm |
| Width | 175mm |
| Height | 190mm |

Weights & Measures

| | |
|-----------------------|--------|
| Mean Weight with Acid | 16.6kg |
|-----------------------|--------|

Container Features

| | |
|---------------------------|----------------|
| Case Type | L2 DIN EFB |
| Terminal Type | T1 |
| Hold Down | B3 |
| State of Charge Indicator | ✓ |
| Handles | ✓ |
| End Venting | ✓ |
| Lid Type | SMF Double Lid |

Technology

| | |
|-------------------------|-------------|
| Flame Arrestor | ✓ |
| Technology | Ca/Ca |
| Separator | PE |
| VDA Roll Over Test | ✓ |
| Recommended Charge Rate | 4A |
| Performance Marking | W3-C2-V3-M1 |

Terminal Type

Cell Assembly Layout

Battery Hold-down

Data Sheet generated on 06/10/2022 - E&OE