



## Yuasa Fiche de données techniques

### Yuasa YBX9019 - Batteries AGM YBX9000 Start Stop Plus

#### Performance

|   |      |
|---|------|
| Tension                                 | 12V  |
| Capacité (20 heures)                    | 95Ah |
| Performances en démarrage à froid (EN1) | 850A |

#### Dimensions

|          |       |
|----------|-------|
| Longueur | 353mm |
| Largeur  | 175mm |
| Hauteur  | 190mm |



#### Poids & Mesures

|                        |        |
|------------------------|--------|
| Poids moyen avec acide | 25.6kg |
|------------------------|--------|

#### Caractéristiques du bac

|                                |            |
|--------------------------------|------------|
| Type de bac                    | L5 DIN AGM |
| Type de bornes                 | T1         |
| Système de fixation            | B3         |
| Poignées                       | ✓          |
| Sortie(s) d'aération           | ✓          |
| Caractéristiques semi-traction | ✓          |
| Type de couvercle              | VRLA       |


#### Technologie

|                           |             |
|---------------------------|-------------|
| Dispositif stop-flamme    | ✓           |
| Technologie               | Ca/Ca VRLA  |
| Séparateur                | AGM         |
| Test de retournement VDA  | ✓           |
| Taux de charge recommandé | 5A          |
| Performance Marking       | W5-C2-V3-M3 |


#### Type de bornes

##### T1


Standard DIN Post

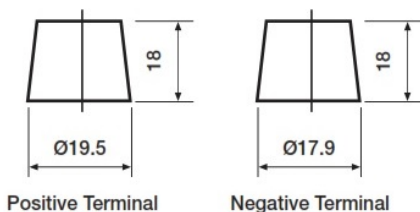

#### Schéma de montage des éléments

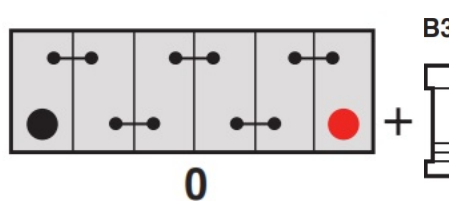

#### Système de fixation de la batterie

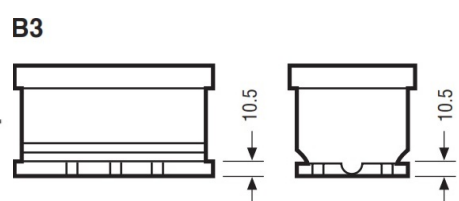

Date de publication: 17/01/2025 - E&OE



## Yuasa Technical Data Sheet

### Yuasa YBX9019 - YBX9000 AGM Start Stop Plus Batteries

#### Performance

|                          |      |
|--------------------------|------|
| Voltage                  | 12V  |
| Capacity (20-hour)       | 95Ah |
| Cold Cranking Amps (EN1) | 850A |

#### Dimensions

|        |       |
|--------|-------|
| Length | 353mm |
| Width  | 175mm |
| Height | 190mm |

#### Weights & Measures

|                       |        |
|-----------------------|--------|
| Mean Weight with Acid | 25.6kg |
|-----------------------|--------|

#### Container Features

|                        |            |
|------------------------|------------|
| Case Type              | L5 DIN AGM |
| Terminal Type          | T1         |
| Hold Down              | B3         |
| Handles                | ✓          |
| End Venting            | ✓          |
| Semi-Traction Features | ✓          |
| Lid Type               | VRLA       |

#### Technology

|                           |                |
|---------------------------|----------------|
| Flame Arrestor Technology | ✓              |
| Separator                 | Ca/Ca VRLA AGM |
| VDA Roll Over Test        | ✓              |
| Recommended Charge Rate   | 5A             |
| Performance Marking       | W5-C2-V3-M3    |

**Terminal Type**

**Cell Assembly Layout**

**Battery Hold-down**

Data Sheet generated on 17/01/2025 – E&OE

