



Yuasa Fiche de données techniques

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Yuasa YBX9096 - Batteries AGM YBX9000 Start Stop Plus

Performance

Tension	12V
Capacité (20 heures)	70Ah
Performances en démarrage à froid (EN1)	760A

Dimensions

Longueur	278mm
Largeur	175mm
Hauteur	190mm



Poids & Mesures

Poids moyen avec acide	20.5kg
------------------------	--------

Caractéristiques du bac

Type de bac	L3 DIN AGM
Système de fixation	B3
Poignées	✓
Sortie(s) d'aération	✓
Caractéristiques semi-traction	✓
Type de couvercle	VRLA


Technologie

Dispositif stop-flamme	✓
Technologie	Ca/Ca VRLA
Séparateur	AGM
Test de retournement VDA	✓
Taux de charge recommandé	4A
Performance Marking	W5-C2-V3-M3

Type de bornes

T1


Standard DIN Post

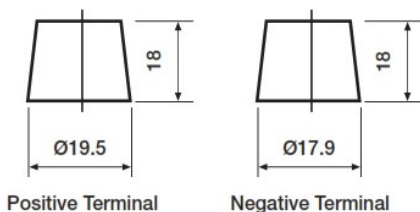


Positive Terminal

Negative Terminal

Schéma de montage des éléments

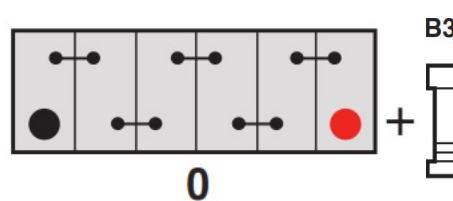

Système de fixation de la batterie

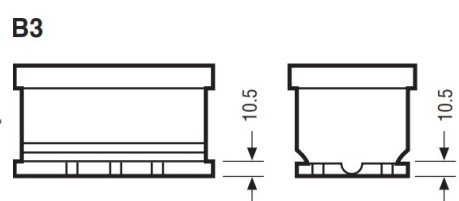

Date de publication: 16/04/2021 - E&OE



Yuasa Technical Data Sheet

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Yuasa YBX9096 - YBX9000 AGM Start Stop Plus Batteries

Performance

Voltage	12V
Capacity (20-hour)	70Ah
Cold Cranking Amps (EN1)	760A

Dimensions

Length	278mm
Width	175mm
Height	190mm

Weights & Measures

Mean Weight with Acid	20.5kg
-----------------------	--------



Container Features

Case Type	L3 DIN AGM
Hold Down	B3
Handles	✓
End Venting	✓
Semi-Traction Features	✓
Lid Type	VRLA


Technology

Flame Arrestor	✓
Technology	Ca/Ca VRLA
Separator	AGM
VDA Roll Over Test	✓
Recommended Charge Rate	4A
Performance Marking	W5-C2-V3-M3

Terminal Type

T1


Standard DIN Post

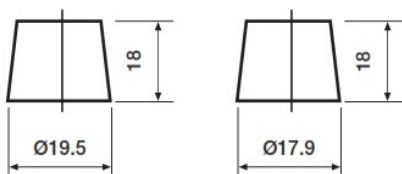


Positive Terminal

Negative Terminal

Cell Assembly Layout

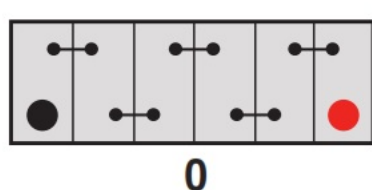

Battery Hold-down

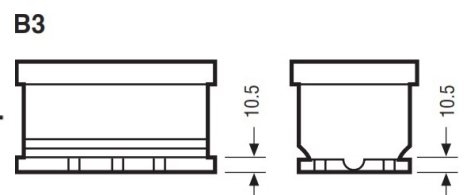

Data Sheet generated on 16/04/2021 - E&OE