



## Yuasa Fiche de données techniques

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

### Yuasa YBX9096 - Batteries AGM YBX9000 Start Stop Plus

#### Performance

Tension	12V
Capacité (20 heures)	70Ah
Performances en démarrage à froid (EN1)	760A

#### Dimensions

Longueur	278mm
Largeur	175mm
Hauteur	190mm



#### Poids & Mesures

Poids moyen avec acide	20.5kg
------------------------	--------

#### Caractéristiques du bac

Type de bac	L3 DIN AGM
Système de fixation	B3
Poignées	✓
Sortie(s) d'aération	✓
Caractéristiques semi-traction	✓
Type de couvercle	VRLA


#### Technologie

Dispositif stop-flamme	✓
Technologie	Ca/Ca VRLA
Séparateur	AGM
Test de retournement VDA	✓
Taux de charge recommandé	4A
Performance Marking	W5-C2-V3-M3


#### Type de bornes

##### T1


Standard DIN Post

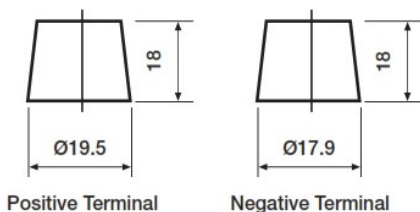

#### Schéma de montage des éléments

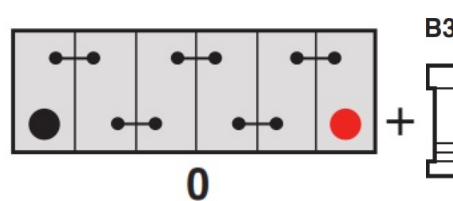

#### Système de fixation de la batterie

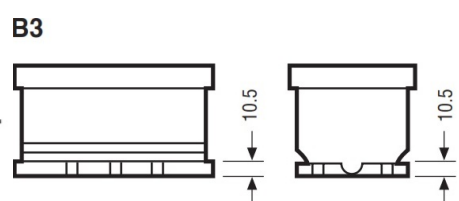

Date de publication: 31/01/2023 - E&OE



## Yuasa Technical Data Sheet

### Yuasa YBX9096 - YBX9000 AGM Start Stop Plus Batteries

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

#### Performance

Voltage	12V
Capacity (20-hour)	70Ah
Cold Cranking Amps (EN1)	760A

#### Dimensions

Length	278mm
Width	175mm
Height	190mm

#### Weights & Measures

Mean Weight with Acid	20.5kg
-----------------------	--------



#### Container Features

Case Type	L3 DIN AGM
Hold Down	B3
Handles	✓
End Venting	✓
Semi-Traction Features	✓
Lid Type	VRLA


#### Technology

Flame Arrestor	✓
Technology	Ca/Ca VRLA
Separator	AGM
VDA Roll Over Test	✓
Recommended Charge Rate	4A
Performance Marking	W5-C2-V3-M3

#### Terminal Type

##### T1


Standard DIN Post

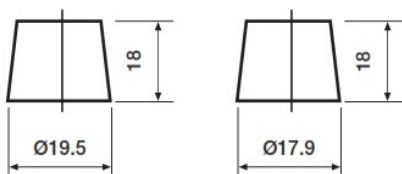

Positive Terminal


Negative Terminal

#### Cell Assembly Layout

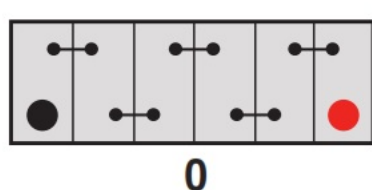

0

##### B3

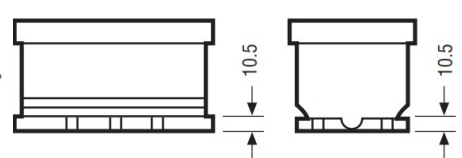

Data Sheet generated on 31/01/2023 - E&OE