



## Yuasa Fiche de données techniques

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

### Yuasa YBX9115 - Batteries AGM YBX9000 Start Stop Plus

#### Performance

Tension	12V
Capacité (20 heures)	80Ah
Performances en démarrage à froid (EN1)	800A

#### Dimensions

Longueur	317mm
Largeur	175mm
Hauteur	190mm



#### Poids & Mesures

Poids moyen avec acide	23.2kg
------------------------	--------

#### Caractéristiques du bac

Type de bac	L4 DIN AGM
Système de fixation	B3
Poignées	✓
Sortie(s) d'aération	✓
Caractéristiques semi-traction	✓
Type de couvercle	VRLA


#### Technologie

Dispositif stop-flamme	✓
Technologie	Ca/Ca VRLA
Séparateur	AGM
Test de retournement VDA	✓
Taux de charge recommandé	5A
Performance Marking	W5-C2-V3-M3


#### Type de bornes

##### T1


Standard DIN Post

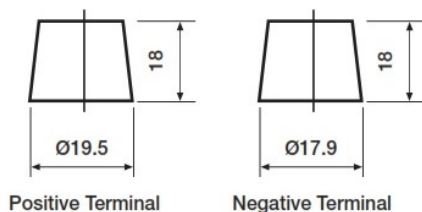

#### Schéma de montage des éléments

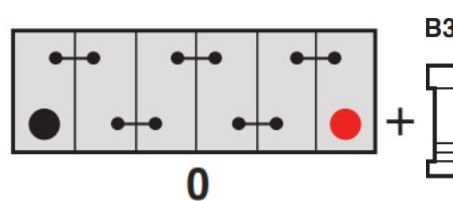

#### Système de fixation de la batterie

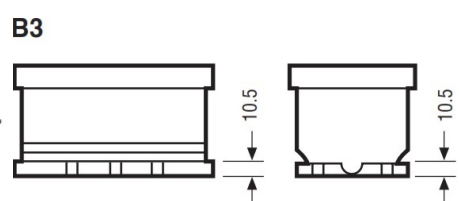

Date de publication: 15/04/2021 - E&OE



## Yuasa Technical Data Sheet

### Yuasa YBX9115 - YBX9000 AGM Start Stop Plus Batteries

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

#### Performance

Voltage	12V
Capacity (20-hour)	80Ah
Cold Cranking Amps (EN1)	800A

#### Dimensions

Length	317mm
Width	175mm
Height	190mm

#### Weights & Measures

Mean Weight with Acid	23.2kg
-----------------------	--------

#### Container Features

Case Type	L4 DIN AGM
Hold Down	B3
Handles	✓
End Venting	✓
Semi-Traction Features	✓
Lid Type	VRLA

#### Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca VRLA AGM
VDA Roll Over Test	✓
Recommended Charge Rate	5A
Performance Marking	W5-C2-V3-M3

**Terminal Type**

**Cell Assembly Layout**

**Battery Hold-down**

Data Sheet generated on 15/04/2021 – E&OE