



## Yuasa Fiche de données techniques

### Yuasa YBX1027 - Batteries CaCa YBX1000

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

#### Performance

Tension	12V
Capacité (20 heures)	56Ah
Performances en démarrage à froid (EN1)	510A

#### Dimensions

Longueur	243mm
Largeur	175mm
Hauteur	190mm

#### Poids & Mesures

Poids moyen avec acide	15kg
Volume d'acide	3.7 Litres



#### Caractéristiques du bac

Type de bac	L2 DIN
Système de fixation	B13B14
Indicateur de l'état de charge	✓
Poignées	✓
Sortie(s) d'aération	✓
Type de couvercle	Ventilation centrale


#### Technologie

Dispositif stop-flamme	✓
Technologie	Ca/Ca
Séparateur	PE
Taux de charge recommandé	5A
Performance Marking	W3-C2-V2-E1


#### Type de bornes

##### T1

Standard DIN Post

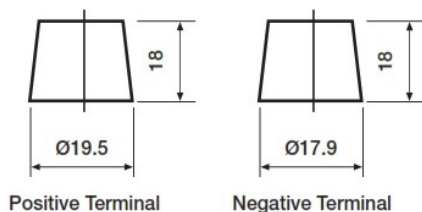

#### Schéma de montage des éléments Système de fixation de la batterie

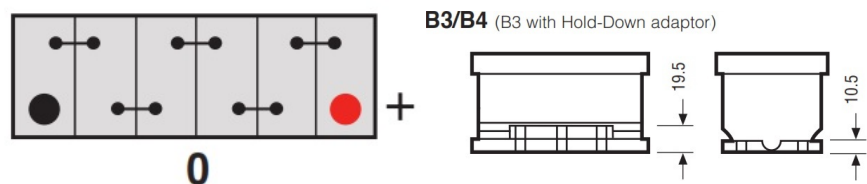

Date de publication: 15/04/2021 - E&OE



## Yuasa Technical Data Sheet

### Yuasa YBX1027 - YBX1000 CaCa Batteries

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

#### Performance

Voltage	12V
Capacity (20-hour)	56Ah
Cold Cranking Amps (EN1)	510A

#### Dimensions

Length	243mm
Width	175mm
Height	190mm

#### Weights & Measures

Mean Weight with Acid	15kg
Acid Volume	3.7 litres



#### Container Features

Case Type	L2 DIN
Hold Down	B13B14
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	Central Venting


#### Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
Recommended Charge Rate	5A
Performance Marking	W3-C2-V2-E1

#### Terminal Type

##### T1


Standard DIN Post

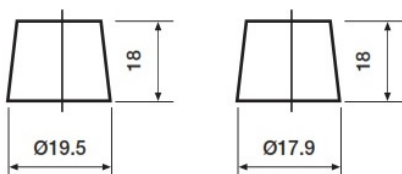

Positive Terminal


Negative Terminal

#### Cell Assembly Layout

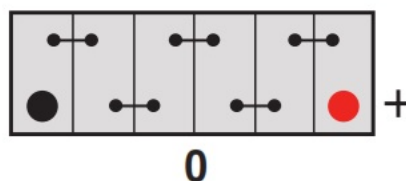

#### Battery Hold-down

B3/B4 (B3 with Hold-Down adaptor)

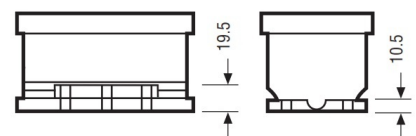

Data Sheet generated on 15/04/2021 - E&OE