



## Yuasa Fiche de données techniques

### Yuasa YBX3019 - Batteries SMF YBX3000

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

#### Performance

Tension	12V
Capacité (20 heures)	95Ah
Performances en démarrage à froid (EN1)	850A

#### Dimensions

Longueur	353mm
Largeur	175mm
Hauteur	190mm



#### Poids & Mesures

Poids moyen avec acide	24kg
------------------------	------

#### Caractéristiques du bac

Type de bac	L5 DIN
Type de bornes	T1
Système de fixation	B3
Indicateur de l'état de charge	✓
Poignées	✓
Sortie(s) d'aération	✓
Type de couvercle	Double capot (anti-écoulement et sans entretien)


#### Technologie

Dispositif stop-flamme	✓
Technologie	Ca/Ca
Séparateur	PE
Test de retournement VDA	✓
Taux de charge recommandé	6A
Performance Marking	W3-C2-V2-E1

#### Type de bornes

##### T1


Standard DIN Post

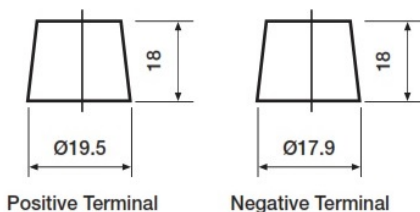


Positive Terminal

Negative Terminal

#### Schéma de montage des éléments

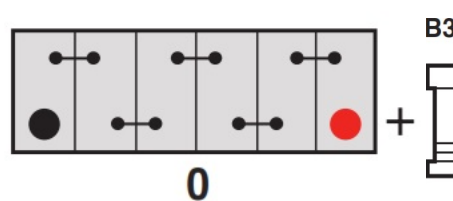

#### Système de fixation de la batterie

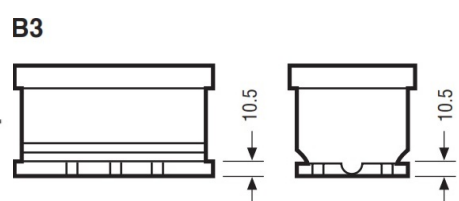

Date de publication: 25/09/2020 - E&OE



## Yuasa Technical Data Sheet

### Yuasa YBX3019 - YBX3000 SMF Batteries

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

#### Performance

Voltage	12V
Capacity (20-hour)	95Ah
Cold Cranking Amps (EN1)	850A

#### Dimensions

Length	353mm
Width	175mm
Height	190mm

#### Weights & Measures

Mean Weight with Acid	24kg
-----------------------	------



#### Container Features

Case Type	L5 DIN
Terminal Type	T1
Hold Down	B3
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


#### Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca
VDA Roll Over Test	PE
Recommended Charge Rate	✓
Performance Marking	6A
	W3-C2-V2-E1


#### Terminal Type

##### T1

Standard DIN Post

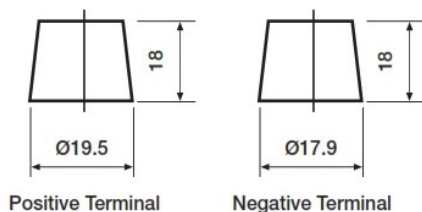

#### Cell Assembly Layout

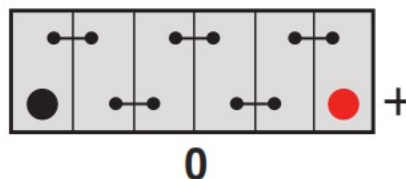

#### Battery Hold-down

Data Sheet generated on 25/09/2020 - E&OE